

Metroled Slimline

UNIVERSAL LOW BAY WITH PRISMATIC DIFFUSER

WADCO[®]
LIGHTING
Built tough™



Standard 5 year Warranty

Applications

- Industrial lighting
- Food and beverage processing facilities
- Carparks and transition areas
- Warehousing and logistics areas

Specifications

- Heavy Duty Powder Coated Anneal Steel Construction
- Wattage: 155W/200W
- 588mm(L) x180mm(H) x 588mm(D)
- Weight: 11.2kg
- Lumens: 16410/22110
- Supply voltage: 220V–240V
- Sealed to IP64

Features


- Slim unobtrusive profile
- Engineered diffuser for superior glare control
- Symmetric light distribution
- Energy saving
- Instant ON/OFF switch
- 100,000hour LED & driver



Australian made and owned
Trusted since 1975

Polar Curve

200W PRISMATIC # CODE - MTSM200C75N

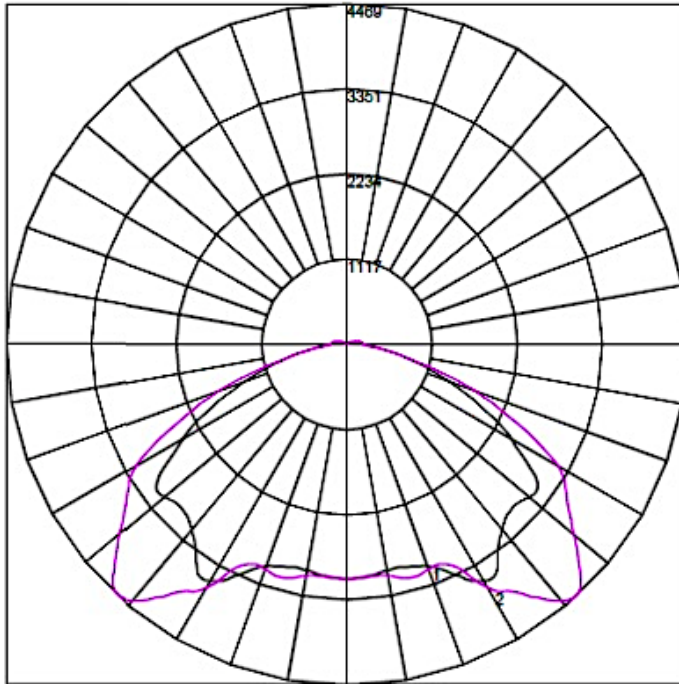

Maximum Candela = 4468.55

Located At Horizontal Angle = 45, Vertical Angle = 42

1 - Vertical Plane Through Horizontal Angles (90 - 270)

2 - Vertical Plane Through Horizontal Angles (45 - 225)


Options

- Emergency lighting
- Dali and 1-10V analogue dimming
- Auxiliary lighting feature in the event of power failure



Australian made and owned
Trusted since 1975

Dimensions

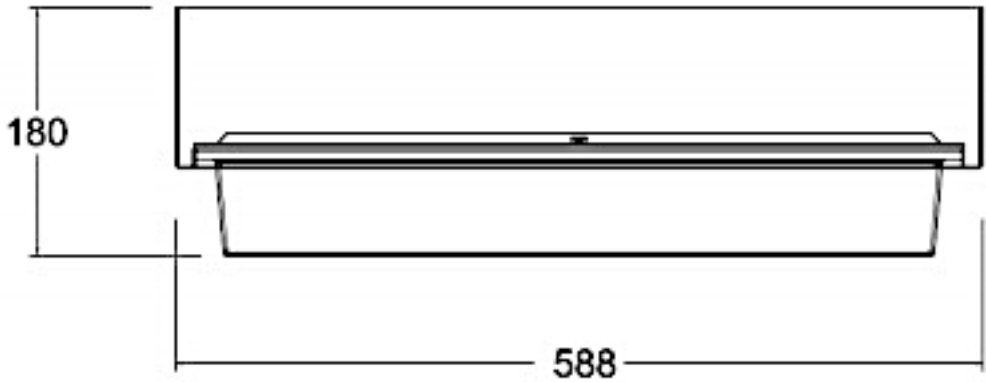

Ordering Guide

MODEL				WATTAGE			LAMP SOURCE	LAMP CRI	LAMP COLOUR TEMPERATURE	DIMMING OPTION	AUXILIARY EMERGENCY
1	2	3	4	5	6	7	8	9	10	11	12
M	T	S	M	2	0	0	S				A
				1	5	5	S - SMD LED	8 - CR80 *	3 - 3000K 4 - 4000K 5 - 5000K	A - ANALOGUE D - DALI N - NON DIMMING	PLEASE SPECIFY ONLY WHERE REQUIRED
				* DRIVE CURRENT DERATING AVAILABLE							



WADCO[®]
LIGHTING
Built tough[™]

+61 7 3897 3700
wadco@qmi.net.au
www.wadco.com.au



Australian made and owned
Trusted since 1975