



METROLED STREAMLINE

LOW BAY BROAD AREA DIFFUSED LIGHT

WADCO
LIGHTING

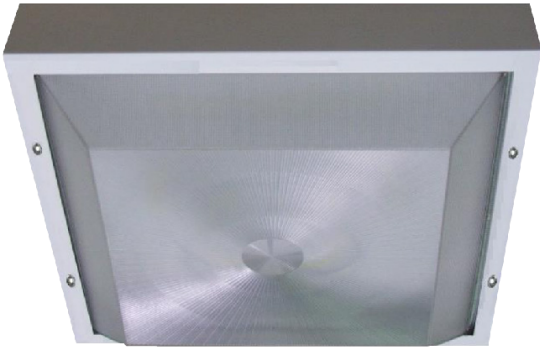


5 Year Warranty

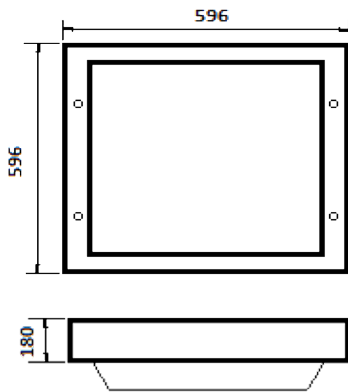

POLAR CURVE

MTSM200C75N




Maximum Candela =24800

LocatedAtHorizontalAngle=45,VerticalAngle=42

#1 -VerticalPlaneThroughHorizontalAngles(90-270)

#2 -VerticalPlaneThroughHorizontalAngles(45-225)

SPECIFICATIONS

- Aluminium housing
- Corrosion resistant
- Rated to IP66
- Vossloh LED's and Driver 
- Wattage: 140W or 190W
- Instant ON/OFF switch
- Supply voltage: 220V-240V
- Acrylic refractor

DIMENSIONS

- 180mm(H) x 596 mm(W)
- Weight: 11.2KG

OPTIONS

- Recessed or surface mounted
- Colour: 3000K, 4000K or 5000K
- 3 hours auxiliary lighting in the event of power failure

sales@wadco.com.au

www.wadco.com.au